


FEATURES:

- 3A,5A switching capacity
- PC board mounting
- Size:15.5x11x11.5mm



Q4100F




Coil Voltage 3,5,6,9,12,24VDC
Contact Ratings 1H:1N/O 1Z:1C/O
ZHNQI Type

CONTACT RATINGS

Contact Ratings	1H/1Z
Contact Resistance	50m Ω (1A 6VDC)
Contact Material	AgCdO, AgS _n O ₂
Contact capacity	3A,5A 250VAC/30VDC

SPECIFICATION

Insulation Resistance	100M Ω . 500VDC
Dielectric Strength	BCC 500V 1 min
	BOC 750V 1 min
Terminal Type	PCB



Q4100F


COIL RATINGS

Nominal Coil Power	0.36W
--------------------	-------

COIL VERSIONS

Nominal Voltage VDC	Pull-in Voltage VDC	Release Voltage VDC	Coil Resistance Ω : ±10%
3	2.3	0.3	25
5	3.8	0.5	70
6	4.5	0.6	100
9	6.8	0.9	220
12	9.0	1.2	400
24	18.0	2.4	1600

DIMENSION.BOTTOM VIEW

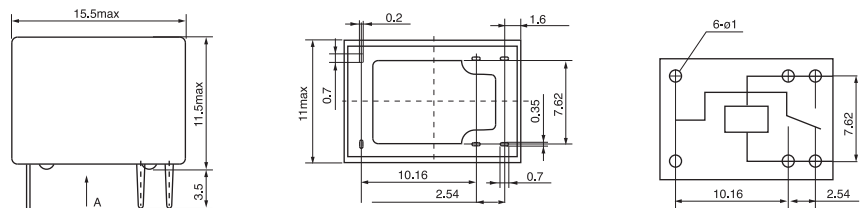

REFERENCE DATA

