

FEATURES:

- 8A, 12A, 16A switching capacity
- Various Terminals
- Size: 29.7x12.8x15mm




Q115F 1Z



Q115F 2Z

Q115F



Coil Voltage 5,6,9,12,18,24,48,60VDC
 Contact Ratings 1H:1N/O 1Z:1C/O
 2H:2N/O 2Z:2C/O
 ZHNQI Type

CONTACT RATINGS

Contact Ratings	1H, 1Z/2H, 2Z
Contact Resistance	50m Ω (1A 6VDC)
Contact Material	AgCdO, AgS _n O ₂
Contact capacity	1H, 1Z: 12A, 16A 250VAC/30VDC 2H, 2Z: 8A 250VAC/30VDC

SPECIFICATION

Insulation Resistance	100M Ω .500VDC
Dielectric Strength	BCC 5000V 1 min
	BOC 1000V 1 min
	BOC 2500V 1 min
Operate Time	7ms/3ms
Terminal Type	PCB, socket


COIL RATINGS

Nominal Coil Power	0.53W
--------------------	-------

COIL VERSIONS

Nominal Voltage VDC	Pull-in Voltage VDC	Release Voltage VDC	Coil Resistance Ω : ±10%
5	3.75	0.5	55
6	4.5	0.6	68
12	8.4	1.2	270
24	18.0	2.4	1087
48	36.4	4.8	4347
60	48.0	6.0	7500
110	82.5	11.0	27170

DIMENSION.BOTTOM VIEW

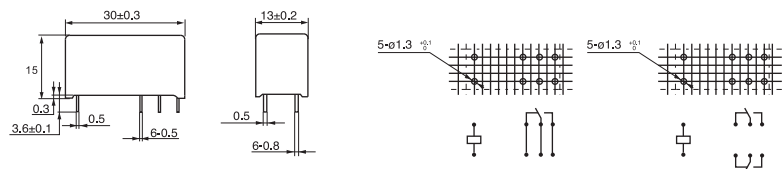

REFERENCE DATA

