


FEATURES:

- With open type,dust-proof cover type
- With matched socket



Q38F
(JQX-38F)

Q38F



Coil Voltage: 5,6,9,12,24,48,60VDC
12V,24V,110V,220VAC
Contact : 2Z,2H 3Z,3H
Contact currentA: 40A B:30A
ZHNQI Type

CONTACT RATINGS

Contact Ratings	2Z,2H/3Z,3H
Contact Resistance	100m Ω (1A 6VDC)
Contact Material	AgCdO, AgS _n O ₂
Contact capacity	30A,40A 250VAC/30VDC

SPECIFICATION

Insulation Resistance	1000M Ω .500VDC
Dielectric Strength	BCC 2500V 1 min
	BOC 1200V 1 min
Operate Time	25ms/15ms
Terminal Type	Socket & PCB


COIL RATINGS

Nominal Coil Power	DC2W~2.5W/ AC4.5W
--------------------	-------------------

COIL VERSIONS

Nominal Voltage VDC	Pull-in Voltage VDC	Release Voltage VDC	Coil Resistance Ω : ±10%	Nominal Voltage VAC	Pull-in Voltage VAC	Release Voltage VAC	Coil Resistance Ω : ±10%
12	9.6	1.20	57	12	9.60	3.60	10
24	19.20	2.40	230	24	19.2	7.20	40.3
48	38.40	4.80	2000	110	88.0	36.00	847
60	48.0	6.00	2850	220/240	176.0	72.00	3380

DIMENSION.BOTTOM VIEW

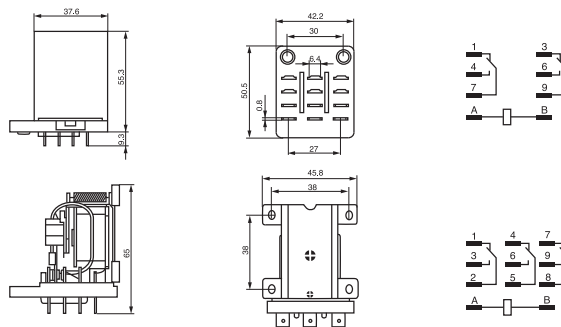

REFERENCE DATA

