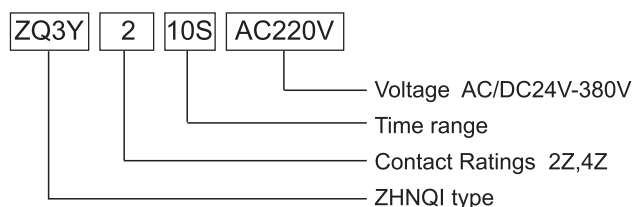


FEATURES:

- Used for control of time order
- With front-surface and back-surface connecting sockets
- LED pilot, display action state


ZQ3Y(H3Y)
ZQ3Y

SPECIFICATION

Voltage	DC12V-48V AC12V-380V50HZ/60Hz
Power expend	DC1.0W AC1.0VA
Control output	2Z 5A220VAC 4Z 3A220VAC
Insulation Resistance	DC500V 100M Ω
Dielectric Strength	BCC1500VAC BOC1000VAC
Operating Temperature	-10°C~50°C
Humidity	35%~85%
Life	Mech:10 ⁷ Elec:10 ³
Weight	≈ 50g

TIME RANGE

Rated Time	Time range	Rated Time	Time range
0.5s	0.05S~0.5S	0.5m	0.05m~0.5m
1s	0.1S~1S	1m	0.1m~1m
5s	0.5S~5S	5m	0.5m~5m
10s	0.5S~10S	10m	0.5m~10m
30s	1.0S~30S	30m	1m~30m
60s	2.0S~60S	60m	2m~60S
180s	3m	180m	0.1h~10h
120s	5.0S~120S	120m	0.1h~10h

DIMENSION.BOTTOM VIEW
