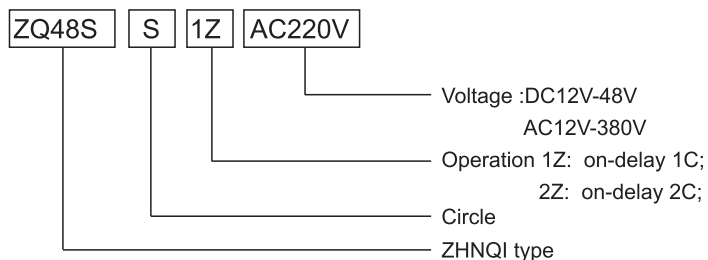


FEATURES:

- Used for control of time order
- With front-surface and back-surface connecting sockets
- LED pilot, display action state


ZQ48S

ZQ48S-S
ZQ48S

SPECIFICATION

Voltage	DC12V-48V AC12V-380V50HZ/60Hz
Power expend	DC1.0W AC1.0VA
Control output	5A220VAC
Insulation Resistance	DC500V 100M Ω
Dielectric Strength	BCC1500VAC BOC1000VAC
Operating Temperature	-10℃~50℃
Humidity	35%~85%
Life	Mech:10 ⁷ Elec:10 ³
Weight	≈ 100g

TIME RANGE

0.01~99.99S
0.01~99.99M
0.01~99.99H

DIMENSION.BOTTOM VIEW
