

FEATURES:

- 6A, 12A switching capacity
- With LED, trial button
- Various terminals
- Size: 41.5x28x35mm



QMY2P



QMY4P



RT702



RT704

QMY4P



Coil Voltage: DC 5~110VDC AC 6~240VAC
 LED
 Contact Ratings: 2Z, 4Z
 ZHNQI Type

CONTACT RATINGS

Contact Ratings	2Z, 2H/4Z, 4H
Contact Resistance	50m Ω (1A 6VDC)
Contact Material	AgCdO, AgS _n O ₂
Contact capacity	2Z: 12A 250VAC/30VDC
	4Z: 6A 250VAC/30VAC

SPECIFICATION

Insulation Resistance	500M Ω .500VDC		
	BCC	1500V	1 min
	BOC	1000V	1 min
Dielectric Strength	CCC	1500V	1 min
Operate Time	25ms/25ms		
Terminal Type	PCB, Socket		


COIL RATINGS

Nominal Coil Power	0.9W/1.2W
--------------------	-----------

COIL VERSIONS

Nominal Voltage VDC	Pull-in Voltage VDC	Release Voltage VDC	Coil Resistance Ω : ±10%	Nominal Voltage VAC	Pull-in Voltage VAC	Release Voltage VAC	Coil Resistance Ω : ±10%
5	4.0	0.50	30	6	4.80	1.80	12
6	4.8	0.60	40	12	9.60	3.60	42
12	9.6	1.20	160	24	19.2	7.20	168
24	19.2	2.40	640	48	38.4	14.4	675
48	38.4	4.80	2560	120	96.0	36.0	3500
110	88.0	11.0	12100	220/240	176.0	66.0	14000/16500

DIMENSION.BOTTOM VIEW

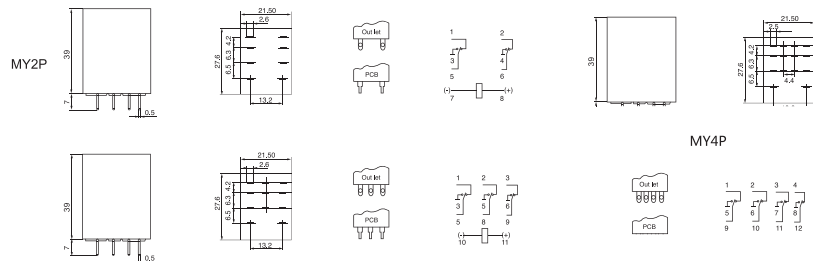

REFERENCE DATA

