

FEATURES:

- 5A, 10A, 16A switching capacity
- Various terminals
- Size: 30x13.5x25.5mm




Q14F1



Q14F2

Q14F1



Coil Voltage 3,5,6,9,12,18,24,48,60VDC
 Contact
 1H: N/O 1Z: C/O
 2H: N/O 2Z: C/O
 ZHNQI Type

CONTACT RATINGS

Contact Ratings	1H,1Z/2H,2Z
Contact Resistance	50m Ω (1A 6VDC)
Contact Material	AgCdO, AgS _n O ₂
Contact capacity	1H,1Z:10A,16A 250VAC/30VDC
	2H,2Z:5A 250VAC/30VDC

SPECIFICATION

Insulation Resistance	100M Ω .500VDC
Dielectric Strength	BCC 5000V 1 min
	BOC 1000V 1 min
Operate Time	15ms/5ms
Terminal Type	PCB,Socket


COIL RATINGS

Nominal Coil Power	0.53W
--------------------	-------

COIL VERSIONS

Nominal Voltage VDC	Pull-in Voltage VDC	Release Voltage VDC	Coil Resistance Ω : ±10%
3	2.25	0.3	20
5	3.75	0.5	50
6	4.50	0.6	68
9	6.75	0.9	160
12	8.40	1.2	270
18	13.5	1.5	650
24	18.0	2.4	1080
48	36.0	4.8	4340
60	45.0	6.0	7000

DIMENSION.BOTTOM VIEW

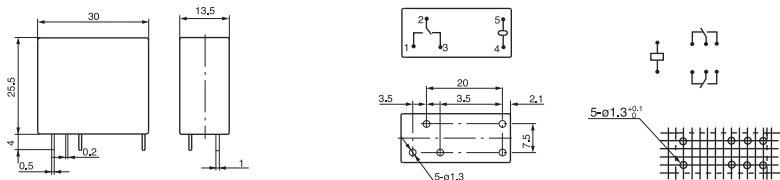

REFERENCE DATA

