


**FEATURES:**

- 5A, 10A, 16A switching capacity
- Various terminals
- Size:30x13.5x21mm




Q14FL 1Z



Q14FL 2Z

**Q14FL**



Coil Voltage 5,6,9,12,18,24,48VDC  
 Contact Ratings 1H:1N/O 1Z:1C/O  
 ZHNQI Type 2H:2N/O 2Z:2C/O

**CONTACT RATINGS**

Contact Ratings	1H,1Z/2H,2Z
Contact Resistance	50m Ω (1A 6VDC)
Contact Material	AgCdO, AgS <sub>n</sub> O <sub>2</sub>
Contact capacity	1H,1Z:10A,16A 250VAC/30VDC 2H,2Z:5A 250VAC/30VDC

**SPECIFICATION**

Insulation Resistance	100M Ω .500VDC
Dielectric Strength	BCC 5000V 1 min
	BOC 1000V 1 min
Operate Time	8ms/5ms
Terminal Type	PCB,Socket


**COIL RATINGS**

Nominal Coil Power	0.53W
--------------------	-------

**COIL VERSIONS**

Nominal Voltage VDC	Pull-in Voltage VDC	Release Voltage VDC	Coil Resistance Ω : ±10%
5	3.75	0.5	50
6	4.5	0.6	68
9	6.75	0.9	120
12	9.0	1.2	270
18	13.5	1.8	450
24	18.0	2.4	1080
48	36.0	4.8	4340

**DIMENSION.BOTTOM VIEW**

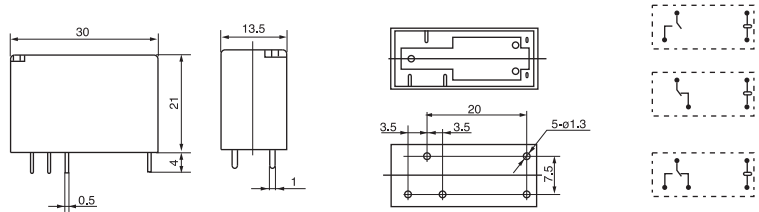

**REFERENCE DATA**

