



**FEATURES:**

- Instant connecting terminal available
- Flange mounting




**Q30F 1Z**



**Q30F 2Z**

**Q30F**

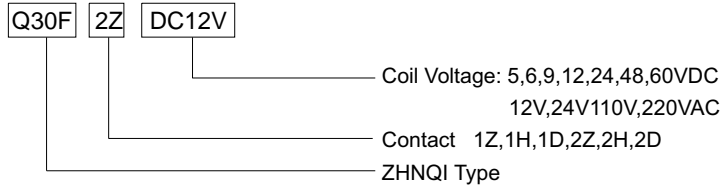

**CONTACT RATINGS**

Contact Ratings	1Z,1H,1D,2Z,2H,2D
Contact Resistance	100mΩ(1A 6VDC)
Contact Material	AgCdO, AgS <sub>n</sub> O <sub>2</sub>
Contact capacity	30A 250VAC

**SPECIFICATION**

Insulation Resistance	1000MΩ.500VDC
Dielectric Strength	BCC 2500V 1 min
	BOC 1200V 1 min
Operate Time	20ms/15ms
Terminal Type	Flange,PCB


**COIL RATINGS**

Nominal Coil Power	DC2.5W AC4.0VA
--------------------	----------------

**COIL VERSIONS**

Nominal Voltage VDC	Pull-in Voltage VDC	Release Voltage VDC	Coil Resistance Ω: ±10%	Nominal Voltage VAC	Pull-in Voltage VAC	Release Voltage VAC	Coil Resistance Ω: ±10%
6	4.80	0.60	30	12	9.60	3.60	11.2
12	9.60	0.20	120	24	19.20	7.20	4.5
24	19.	2.40	330	48	38.40	14.40	100
48	38.4	4.8	1820	110	88.00	36.00	940
60	48.0	6.00	2800	220	176.00	72.00	3764
110	88.0	11.0	9650	240	176.00	72.00	5050

**DIMENSION.BOTTOM VIEW**

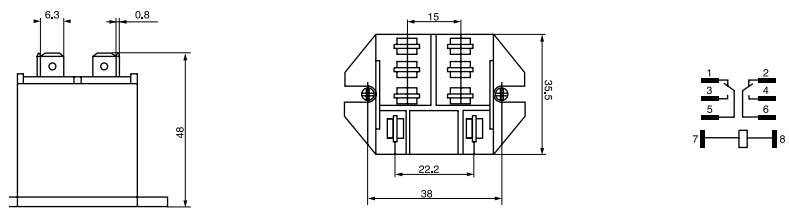

**REFERENCE DATA**

