


FEATURES:

- With open type, dust-proof cover type
- Flange mounting, screw mounting



Q59F 1Z
(JQX-59F)

Q59F

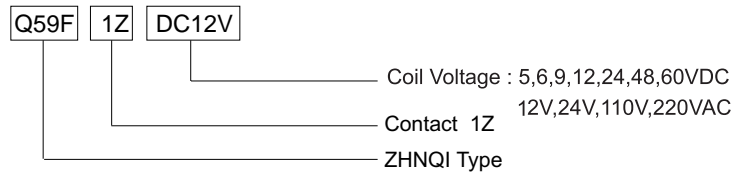

CONTACT RATINGS

Contact Ratings	1Z,1H,1D
Contact Resistance	100mΩ(1A 6VDC)
Contact Material	AgCdO, AgS ₂ O ₂
Contact capacity	80A 250VAC

SPECIFICATION

Insulation Resistance	1000MΩ.500VDC
Dielectric Strength	BCC 2500V 1 min
	BOC 1200V 1 min
Operate Time	25ms/25ms
Terminal Type	Screw, Flange Mounting


COIL RATINGS

Nominal Coil Power	DC3.6W AC4.4VA
--------------------	----------------

COIL VERSIONS

Nominal Voltage VDC	Pull-in Voltage VDC	Release Voltage VDC	Coil Resistance Ω: ±10%	Nominal Voltage VAC	Pull-in Voltage VAC	Release Voltage VAC	Coil Resistance Ω: ±10%
6	4.80	0.60	10	6	4.80	1.80	8.27
12	9.60	1.20	40	12	9.60	3.60	32.7
24	19.2	2.40	160	24	19.20	7.20	130
48	38.4	4.80	640	48	38.40	14.4	523.6
60	48.0	6.00	2800	110	88.00	36.0	2750
110	88.0	11.0	9650	220/240	176.00	72.0	11000/13090

DIMENSION.BOTTOM VIEW

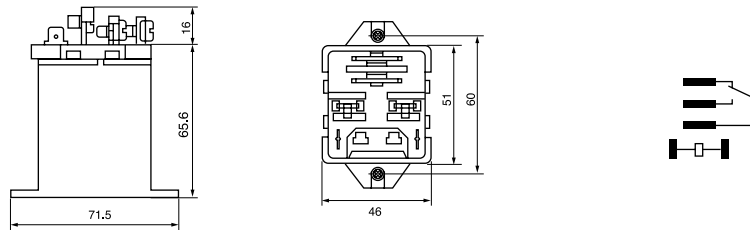

REFERENCE DATA

