


FEATURES:

- 30A,40A switching capacity
- PC board mounting
- Size:32.2x27.5x27.8mm



Q93F



Coil Voltage 5,6,9,12,18,24,48,60VDC
Contact
1H: N/O type 1Z: C/O
ZHNQI

CONTACT RATINGS

Contact Ratings	1H/1Z	
Contact Resistance	50m Ω (1A 6VDC)	
Contact Material	AgCdO, AgS ₂ O ₂	
Contact capacity	NO: 30A 250VAC/30VDC	NC: 20A 250VAC/30VDC
	NO: 40A250VAC/30VDC	NC: 30A250VAC/30VDC



Q93F (T93) 30A

SPECIFICATION


Insulation Resistance	100M Ω .500VDC		
Dielectric Strength	BCC	2500V	1 min
	BOC	1500V	1 min
Operate Time	15ms/10ms		
Terminal Type	PCB		

COIL RATINGS

Nominal Coil Power	0.9W
--------------------	------


COIL VERSIONS

Nominal Voltage VDC	Pull-in Voltage VDC	Release Voltage VDC	Coil Resistance Ω : ±10%
5	3.75	0.5	27
6	4.50	0.6	40
9	6.75	0.9	97
12	9.00	1.2	155
15	11.25	1.5	256
18	13.50	1.8	380
24	18.00	2.1	660
48	36.00	4.8	2560
70	52.50	7.0	5500
110	82.50	11	13450



Q93F (T93) 40A

DIMENSION.BOTTOM VIEW

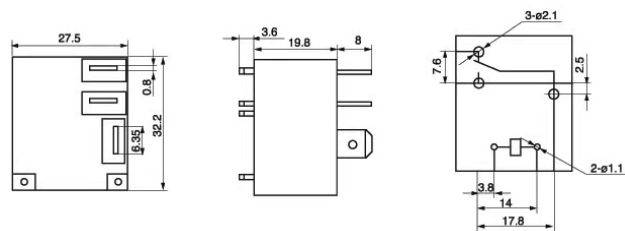

REFERENCE DATA

