

### FEATURES:

- 3A,5A switching capacity
- With LED
- Various terminals
- Size:28x21.5x35mm



QMY2



QMY4



PYF08A-E



PYF14A-E

### QMY2N



Coil Voltage: DC 5~110V AC 6~380V  
 LED  
 Contact Ratings: 2Z 2H , 4Z 4H  
 ZHNQI Type

### CONTACT RATINGS

Contact Ratings	2Z,2H/4Z,4H
Contact Resistance	50m Ω (1A 6VDC)
Contact Material	AgCdO, AgS <sub>n</sub> O <sub>2</sub>
Contact capacity	2Z: 5A 250VAC/30VDC
	4Z: 3A 250VAC/30VDC

### SPECIFICATION

Insulation Resistance	500M Ω .500VDC
Dielectric Strength	BCC 1500V 1 min
	BOC 1000V 1 min
	COC 1500V 1 min
Operate Time	20ms/15ms
Terminal Type	PCB, Socket


### COIL RATINGS

Nominal Coil Power	0.9W
--------------------	------

### COIL VERSIONS

Nominal Voltage VDC	Pull-in Voltage VDC	Release Voltage VDC	Coil Resistance Ω : ±10%	Nominal Voltage VAC	Pull-in Voltage VAC	Release Voltage VAC	Coil Resistance Ω : ±10%
5	4.0	0.50	30	6	4.80	1.80	12
6	4.8	0.60	40	12	9.60	3.60	42
12	9.6	1.20	160	24	19.2	7.20	168
24	19.2	2.40	640	48	38.4	14.4	675
48	38.4	4.80	2560	110	96.0	36.0	3500
110	88.0	11.0	12100	220/240	176.0	66.0	14000

### DIMENSION.BOTTOM VIEW

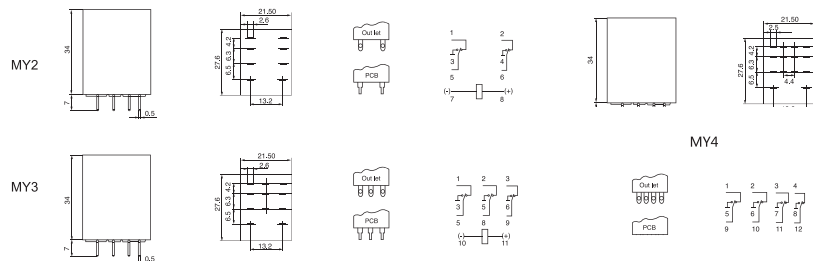

### REFERENCE DATA

